

Pyro | AV VT600

Professional Plug & Play Video Encoding Solution

Features

- Full frame, live motion video capture
- 10 bits digital video processing
- Adaptive de-interlacing
- Adaptive median filter
- 48KHz 16-bit stereo dual independent audio channels
- Easy to install USB 2.0 connectivity
- Rackmountable design fits any environment
- VideoTizer software included for local encoding and network streaming
- Support for Adobe Flash Media Encoder, Windows Media Encoder, Microsoft Expression Encoder 2 and other popular broadcast solutions

Specifications

- Video Resolution
 - 720x480 @ 29.97 fps
 - 720x576 @ 25 fps
- Video Input
 - Composite (CVBS)
 - S-Video
 - YUV (RGB or YPbPR)
 - SDI
- Audio Input
 - Balanced XLR
 - AES EBU
 - SDI (Embedded)
- Output
 - Composite (CVBS) Video
 - RCA Audio Monitor
- USB Interface - High Speed USB 2.0
- Power
 - 12V DC 1.5A
- Dimensions
 - 18.89"x2.95"x1.77" (480x75x45 mm)

Includes

- VT600 device
- 6' USB A to B Cable
- Rackmount kit (mounting brackets and screws)
- CD containing
 - Device drivers
 - VideoTizer media streaming application




Front





Back

VT600 imports uncompressed audio and video from any source, then encode and/or broadcast.

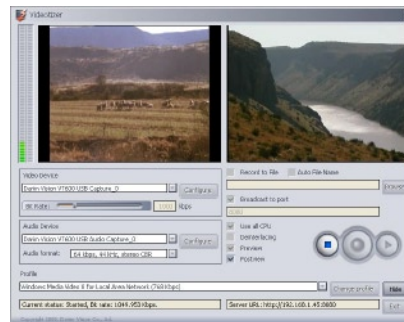

The included VideoTizer application makes streaming your content effortless.

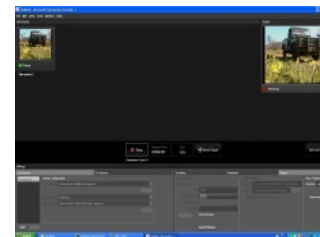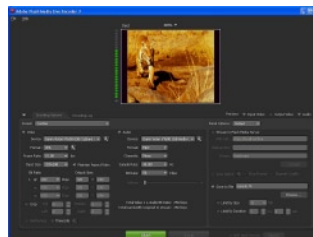

Designed with an open architecture, VT600 supports Adobe Flash Media Encoder, Microsoft Expression 2 & more.

VT600

Part # PVC-VT600

UPC: 8-72307-60000-5

Box Dimensions: 15.75"W x 10.5"H x 3.25"D

Shipping Weight: 4 lbs.

Pyro | AV
www.pyroav.com

16617 Valley View Ave.
Cerritos, CA 90703, USA
p: + 1-562-926-1008
f: + 1-562-299-5541
e: sales@pyroav.com